



***Redefining the way
you experience sound.™***

technical information sheet

TK-5CT

3-Way Freestanding Tower Loudspeaker

Applications:


The TK-5CT, flagship of the TK Series, is a 3-way freestanding tower loudspeaker. Constructed of high quality components, the TK-5CT incorporates ¾-inch medium density fiberboard cabinetry and proprietary fiberglass cone midrange drivers. Designed for home theater and other demanding listening environments, the TK-5CT delivers on its promise of powerful bass and acoustic purity.

Technical Information:

- Model Name/Number:** TK-5CT
Primary Use: Freestanding Tower Loudspeaker
Series: TK Series
System Type: 3-way Sealed & Bass Reflex
Frequency Response: 45Hz — 20kHz ± 3dB
Sensitivity: 87dB (2.83 Volts @ 1 Meter)
Recommended Power: 70-150 Watts
Drive Units: (1) 8" Pulp Kraft Cone Subwoofer
(2) 5¼" Fiberglass Cone Woofers
(1) 1" Silk Dome Tweeter
Tweeter Protection: Yes
Crossover Frequency: 120 Hz/3000 Hz
Crossover Slope: 12dB/Octave
Impedance: 8 Ohms
Color: Black/Rosewood (gloss black accents)
Grille: Black Cloth
Video Shielding: Yes
Finished Dimensions: 11" W x 42½" H x 13¾" D
Weight: 40 Lbs.
Warranty: 5 Years*



Frequency Response Graph:

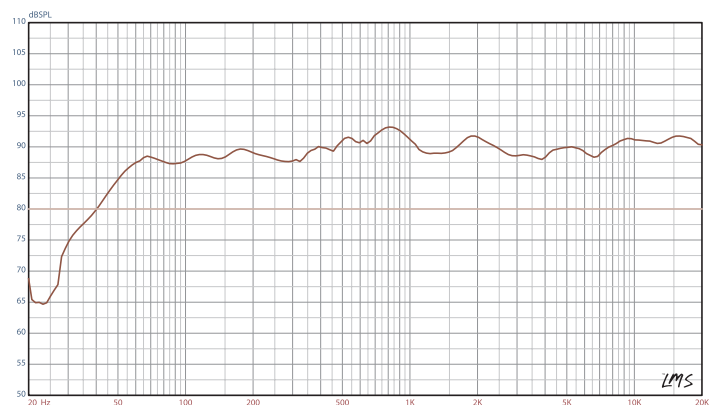

*Warranted for 5 (five) years from date of purchase to be free from defects and workmanship. For more information see your RBH dealer.

RBH Sound

Layton, Utah • USA
(800) 543-2205 • www.rbhsound.com

It is the policy of RBH to constantly incorporate improvements into products; all specifications are subject to change without notice.
Copyright © 2006, RBH Sound. All rights reserved.